

Basic Series

512




Certified for:

- Sound insulation
43 dB
- Fire resistance:
30 min. (EPDM standard gasket)
60 min. (optional silicon gasket)
- Insulation from smoke
2,30 m³ / h / m - 25 Pa
- Usage cycles
200.000 cycles


Protects from:

- Air
- Water
- Light
- Insects

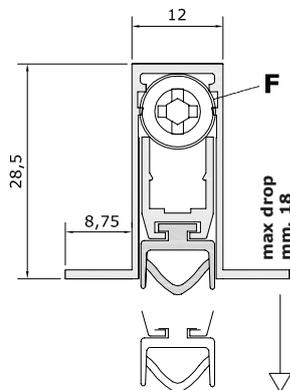

Not an obstacle for disabled persons

STANDARD ACCESSORIES

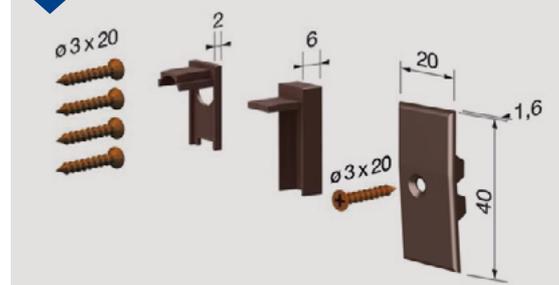

Standard measurements (mm)	330	430	530	630	730	830	930	1030	1130	1230	1330
Max shortening (mm)	130	130	200	200	200	200	200	200	200	200	200

FASTENING SYSTEMS



With side flaps (Omega)

Mechanism with a single adjustment (screw F: descent) characterised by the controlled movement of the moving profile with gasket (immediate descent from the hinge side of the door and consequent gradual descent for the entire length) for adjustment to the floor.

STANDARD: Cardboard box with 32 pcs + 32 standard accessory packs.

MAIN APPLICATIONS



Wood door

Armoured door

Extruded profiles in aluminium alloy 6060 - tubular gasket in EPDM - elements printed in self-lubricating nylon + nylon reinforced with 30% glass fibre - threaded rods in burnished iron - Ø 5 mm brass bushing - coil springs in treated stainless steel.

OPTIONAL ACCESSORIES

Details on page 102

1 Nylon plate

CA101 CA102 CA104

100 pcs pack
 brown, white

2 Insulating nylon plate with silicon gasket

PI001 PI002 PI002-R

20 pcs pack
 brown, white

Application examples

Smooth frame



BUTTON (F): hexagonal brass, square nylon, bevelled nylon, rolling nylon (pivot).
GASKET: silicon tubular, brush.

OPTIONAL: Cardboard box with 15 polyethylene bags with 1 pc + 1 standard accessory pack + assembly instructions.